



## DIN 844 AKMN

Frezy trzpieniowe walcowo-czołowe, z ostrzami centralnymi, wielostrzowe, z chwytem walcowym, krótkie, HSS-E

End mills centre cutting, multiflute, with plain shank, standard series, HSS-E

Schaftfräser, Zentrumschnitt, Zylinderschaft, 4 Schneiden, kurz, HSS-E

Фрезы концевые с центральным зубом, многоперьевые, с цилиндрическим хвостовиком, стандартные, HSS-E

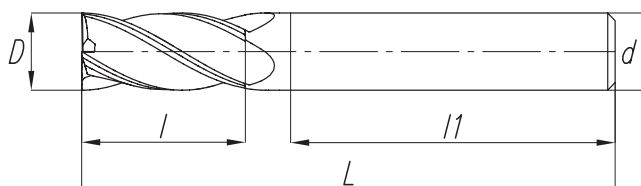

D (js14)	d (h8)	L	l	l1	z	HSS-E	
						Code No	0641-551-
2	6	51	7	36	4	703103	●
2.5	6	52	8	36	4	703116	●
3	6	52	8	36	4	703205	●
3.5	6	54	10	36	4	703218	●
4	6	55	11	36	4	703307	●
4.5	6	55	11	36	4	703409	●
5	6	57	13	36	4	703500	●
5.5	6	57	13	36	4	703513	●
6	6	57	13	36	4	703602	●
6.5	10	66	16	40	4	703615	●
7	10	66	16	40	4	703704	●
8	10	69	19	40	4	703806	●
8.5	10	69	19	40	4	703819	●
9	10	69	19	40	4	703908	●
9.5	10	69	19	40	4	703910	●
10	10	72	22	40	4	704002	●
11	12	79	22	45	4	704104	●
12	12	83	26	45	4	704206	●
13	12	83	26	45	4	704308	●
14	12	83	26	45	4	704400	●
15	12	83	26	45	4	704501	●
16	16	92	32	48	4	704603	●



## DIN 327 BK

Frezy trzpieniowe, 2-ostrzowe, z chwytem walcowym, do rowków na wpusty, HSS-E

Slot drills, 2-flute, with plain shank, HSS-E

Langlochfräser, 2-Schneiden, Zylinderschaft, HSS-E

Фрезы концевые шпоночные, 2-х перьевые, с цилиндрическим хвостовиком, HSS-E

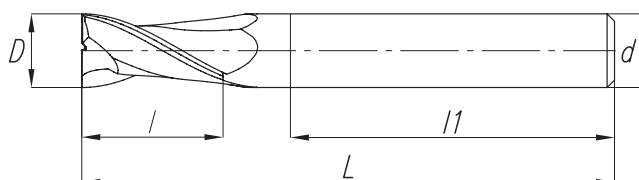

D (e8)	d (h8)	L	l	l1	z	HSS-E	
						Code No	0641-554-
2	6	48	4	36	2	100005	●
2.5	6	49	5	36	2	100018	●
3	6	49	5	36	2	100031	●
4	6	51	7	36	2	100107	●
5	6	52	8	36	2	100300	●
6	6	52	8	36	2	100504	●
7	10	60	10	40	2	100708	●
8	10	61	11	40	2	100901	●
9	10	61	11	40	2	101000	●
10	10	63	13	40	2	101200	●
11	12	70	13	45	2	101304	●
12	12	73	16	45	2	101505	●
13	12	73	16	45	2	101607	●
14	12	73	16	45	2	101709	●
16	16	79	19	48	2	101800	●
18	16	79	19	48	2	101902	●
20	20	88	22	50	2	102000	●